


Universal MPTL plug Solarix CAT6A STP RJ45 toolless

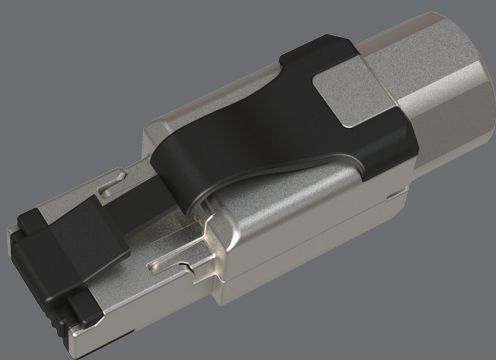

Product number:
11910005

Type number
SXRJ45-6A-STP-BK-SA-N

EAN barcode:
8595684705058



Key features

- Robust and highly reliable category 6A/Class E_A plug
- Designed for ethernet protocols, including 2.5GBASE-T, 5GBASE-T and 10GBASE-T
- Very easy and quick installation, toolless termination, for both solid and stranded wires (AWG 26-23)
- Designed for shielded cables from Ø 6.0 mm to Ø 8.0 mm with wires up to Ø 1.5 mm (incl. PE insulation)
- 50 µin gold contact plating
- The plug meets the ISO/IEC 11801, EN 50173, and ANSI/TIA 568.2-E cabling standards and its performance is suitable for modular plug terminated link (MPTL)
- The colour of the plug is black (plastic parts) and silver (metal body)
- Length is 44.1 mm

Cabling standards

General standards

EN 50173-1, EN 50173-2, ISO/IEC 11801-1, ISO/IEC 11801-2, ANSI/TIA 568.2-E

Product standards

EN 60603-7-51, IEC 60512-99-002

Supported protocols

	10BASE-T	100BASE-TX	1000BASE-T	2.5GBASE-T	5GBASE-T
Supported by the SXRJ45-6A-STP-BK-SA-N plug	YES	YES	YES	YES	YES

Supported PoE

	802.3af	802.3at
PoE type	Type 1	Type 2
Maximum current	350 mA	600 mA
No. of pairs used	2	2
Supported by the SXRJ45-6A-STP-BK-SA-N plug	YES	YES



Physical parameters

Plug construction	STP, dismountable
Plug type	RJ45 8p8c
Min. contacts lifetime	1000 connections/disconnections
Contacts plating	50 µin gold
Termination	toolless
Size and type of conductor	AWG 26 – 23, solid and stranded
Cable size	min. Ø 6.0 mm, max. Ø 8.0 mm
Max. wire size (incl. insulation)	Ø 1.5 mm
Plug body colour	black (plastic parts) and silver (metal body)
Length	44.1 mm


Operation and storage

Storage temperature	-25 to 70 °C
Operating temperature	-40 to 70 °C
Max. operating humidity	93%

Logistic parameters

Plug packaging size (h x w x d)	165 mm x 90 mm x 15 mm, plastic bag
Weight	20 g
Included in the package	1 x plug
Master packaging	280x plug
Inner packaging	70x plug
Master packaging size (h x w x d)	230 mm x 515 mm x 400 mm, carton box
Batch marking	yes (on the product, its packaging and on the transport master box)
Batch and product numbers barcode	IDAutomation Code 39, ANSI/ISO/AIM specification
EAN code type	EAN-13

Plug label

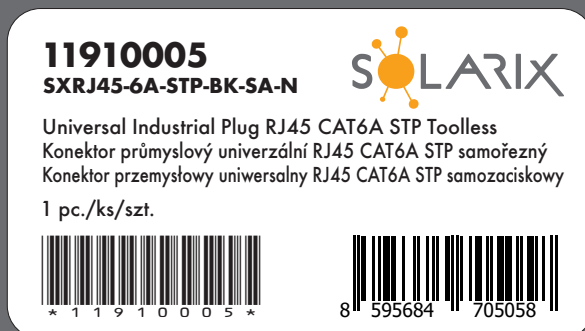

Solarix warranties

Standard warranty **5 years**



Related products

Product Number	Type Number	Description
26000025	SXKD-6A-STP-LSOH	Installation Cable Solarix CAT6A STP LSOH Dca-s1,d2,a1 500m/reel
26000037	SXKD-6A-STP-LSOH-B2ca	Installation Cable Solarix CAT6A STP LSOH B2ca-s1,d1,a1 500m/reel
26000038	SXKD-6A-FFTP-LSOH	Installation Cable Solarix CAT6A FFTP LSOH Dca-s2,d2,a1 500m/reel
26000039	SXKD-6A-UTP-LSOHFR-B2ca	Installation Cable Solarix CAT6A UTP LSOHFR B2ca-s1,d1,a1 500m/reel
26000040	SXKD-6A-STP-PE	Installation Cable Solarix CAT6A STP PE Fca 500m/reel
27000007	SXKD-7-SSTP-LSOH	Installation Cable Solarix CAT7 SSTP LSOH Cca-s1,d1,a1 1000 MHz 500m/reel
27000010	SXKD-7-SSTP-LSOHFR-B2ca	Installation Cable Solarix CAT7 SSTP LSOHFR B2ca-s1,d1,a1 1000 MHz 500m/reel
27000022	SXKD-7A-1200-SSTP-LSOHFR-B2ca	Installation Cable Solarix CAT7A SSTP LSOHFR B2ca-s1,d1,a1 1200 MHz 500m/reel

